


P41 PROGRAMMABLE TRANSDUCER OF 1-PHASE POWER NETWORK PARAMETERS


FEATURES:




INPUT:



OUTPUT:



GALVANIC ISOLATION:



Technical support:
tel.: (+48 68) 45 75 143, 45 75 141, 45 75 144, 45 75 140
e-mail: export@lumel.com.pl

Export department:
tel.: (+48 68) 45 75 130, 45 75 132
e-mail: export@lumel.com.pl

Calibration & Attestation:
e-mail: laboratorium@lumel.com.pl

LUMEL S.A.
ul. Słubicka 4,
65-127 Zielona Góra, Poland
tel.: +48 68 45 75 100,
WWW.LUMEL.COM.PL



- Measurement of 1-phase network parameters
U, I, f, P, Q, S, PF, tg φ, φ, Ep, Eq
- Universal input 1 A or 5 A, 100 V or 400 V
- Programmable analog output -20 mA...+20 mA
- RS485 Modbus RTU Slave interface
- Logging of a selected measured value (9000 samples)
- Programmable current and voltage transformer ratios.
- Transducer configuration using USB and eCon software.

EXAMPLE OF APPLICATION



Conversion and recording of current engine load and energy consumption.
Monitoring of single-phase network parameters.

MEASURED VALUES AND RANGES

Measured value	Range	Basic error
Current I_n 1 A 5 A	0,005 .. 1,200 A~ 0,025 .. 6,000 A~	±0,2%
Voltage L-N 100 V 400 V	1 .. 120 V 4 .. 480 V	±0,2%
Frequency (f)	45,0...66,0...100 Hz	±0,2%
Active power (P)	-2,88 kW... 1,40 W...2,88 kW*	±0,5%
Reactive power (Q)	-2,88 kvar... 1,40 var...2,88 kvar*	±0,5%
Apparent power (S)	1,40 VA...2,88 kVA*	±0,5%
PF	-1...0...1	±0,5%
Tangens φ	-1,2...0...1,2	±1%
φ	0...359	±1%
Active energy (Ep)	0 .. 99 999 999,9 kWh	±0,5%
Reactive energy (Eq)	0 .. 99 999 999,9 kvarh	±0,5%

OUTPUT

Output type	Properties
Analog	-20...0...20 mA, Load resistance = 0...250 Ω

DIGITAL INTERFACE

Interface type	Transmission protocol	Mode	Baud rate
RS-485	MODBUS RTU Address 1...247	8N2, 8E1, 8O1, 8N1	4,8; 9,6; 19,2; 38,4 kbit/s
USB 1.1/ 2.0	MODBUS RTU Address 1	8N2	9,6 kbit/s

EXTERNAL FEATURES

Overall dimensions	45 x 120 x 100 mm	DIN rail 35mm
Weight	0.2 kg	
Protection grade	for housing: IP40	for terminals: IP10



RATED OPERATING CONDITIONS

Power supply	<ul style="list-style-type: none"> • 85..253 V a.c. 40..400 Hz; / 90..300 V d.c. • 20..40 V a.c. 40..400 Hz; / 20..60 V d.c. 	Power consumption: in supply circuit ≤ 3 VA in voltage circuit $\leq 0,05$ VA in current circuit $\leq 0,05$ VA
Temperature	ambient: -10...23...55°C	storage: -30...70°C
Relative humidity	25 .. 95%	inadmissible condensation
Working position	any	
Standard conversion time	1.2 s	
Maximal conversion time	2.2 s	
Preheating time	5 min	
External magnetic field	0...40... 400 A/m	
Short duration overload (5 s)	voltage input: $2 U_N$ (max. 1000 V)	current input: $10 I_N$
Sustained overload	current: $1,2 I_N$	voltage: $1,2 U_N$

SAFETY AND COMPATIBILITY REQUIREMENTS

Electromagnetic compatibility	noise immunity	acc. EN 61000-6-2
	noise emissions	acc. EN 61000-6-4
Isolation between circuits	basic	acc. EN 61010-1
Pollution level	2	
Installation category	III	
Maximal phase-to-earth working voltage	- for supply and measuring circuits 300V - for other circuits 50 V	
Altitude above sea level	< 2000 m	

CONNECTION DIAGRAM

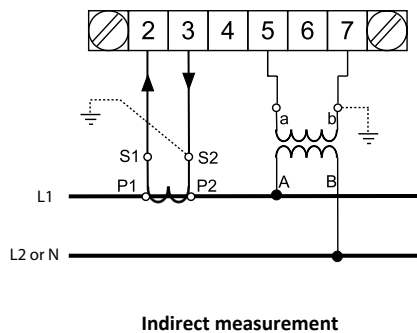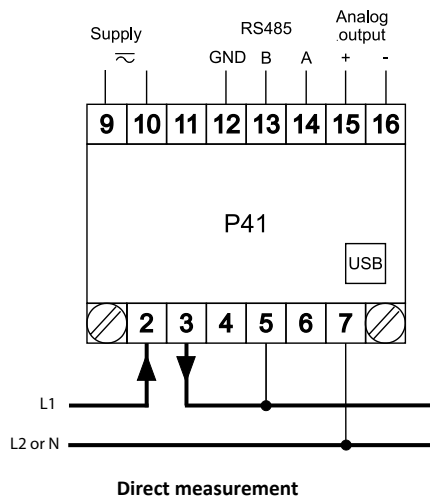

ORDERING

Code	Description
P41 100M0	Transducer of network parameters P41, 1 x analog output; supply 85-253Vac, 90-320Vdc documentation and descriptions in Polish and English, test certificate

For more information about LUMEL's products please visit our website:
www.lumel.com.pl

Technical support:
tel.: (+48 68) 45 75 143, 45 75 141, 45 75 144, 45 75 140
e-mail: export@lumel.com.pl
Export department:
tel.: (+48 68) 45 75 130, 45 75 132
e-mail: export@lumel.com.pl
Calibration & Attestation:
e-mail: laboratorium@lumel.com.pl

LUMEL S.A.
ul. Słubicka 4,
65-127 Zielona Góra, Poland
tel.: +48 68 45 75 100,
WWW.LUMEL.COM.PL