

LUMEL




ND31LITE

POWER NETWORK METER


WITH MODBUS RTU PROTOCOL (RS-485)

FEATURES

- **Measurement** of 54 power network parameters, including **current and voltage harmonics up to 63rd** in 1-phase 2-wire or 3-phase 3- or 4-wire balanced and unbalanced systems.
- High accuracy class (0.2S for active energy).
- **Graphical color display:** LCD TFT 3,5", 320 x 240 pixels, **fully configurable by a user** (10 screens, 8 parameters in each).
- Additional 2 screens for harmonics presentation and 1 dedicated screen for visualization in the form of an analog meter.
- Indications include the values of programmed ratios.
- Memory of minimum and maximum values.
- 2 configurable alarm outputs.
- Supervisory relay mode for alarm outputs.
- Programming of parameters using **free eCon software**.
- Battery backup RTC.
- Overall dimensions: 96 x 96 x 77 mm.

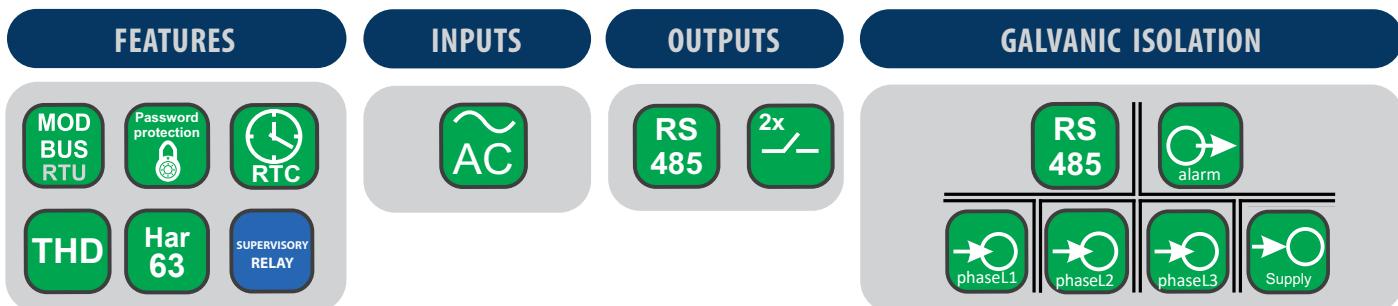

EXAMPLE OF APPLICATION

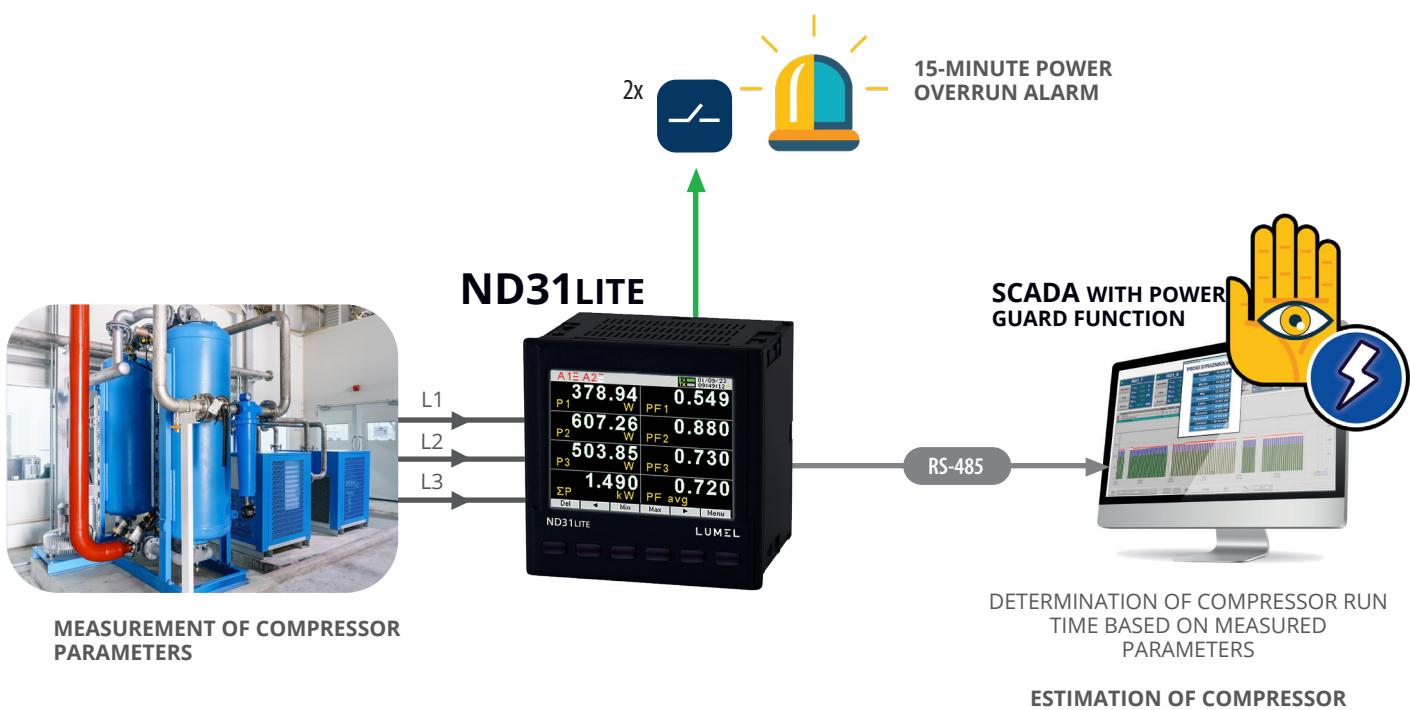

MEASUREMENT AND VISUALIZATION OF POWER NETWORK PARAMETERS

- phase voltages: U_1, U_2, U_3
- phase-to-phase voltages: U_{12}, U_{23}, U_{31}
- phase currents I_1, I_2, I_3
- active phase powers: P_1, P_2, P_3
- reactive phase powers: Q_1, Q_2, Q_3
- apparent phase powers: S_1, S_2, S_3
- active power factors: $\text{PF}_1, \text{PF}_2, \text{PF}_3$
- reactive/active power factors: $\text{tg}\varphi_1, \text{tg}\varphi_2, \text{tg}\varphi_3$
- active, reactive and apparent 3-phase power: P, Q, S
- mean 3-phase power factors: $\text{PF}, \text{tg}\varphi$
- frequency f
- mean 3-phase voltage: U_s
- mean phase-to-phase voltage: U_{mf}
- mean 3-phase current: I_s
- 15, 30, 60 minutes' mean active power: P_{demand}
- mean apparent power S_{demand}
- average current I_{demand}
- active, reactive and apparent 3-phase energy: $\text{EnP}, \text{EnQ}, \text{EnS}$
- active, reactive and apparent energy from external counter: EnPE
- total harmonic content coefficients for phase voltages and currents $\text{THD}_{U1}, \text{THD}_{U2}, \text{THD}_{U3}, \text{THD}_{I1}, \text{THD}_{I2}, \text{THD}_{I3}$ and for 3-phase voltages and currents $\text{THD}_U, \text{THD}_I$
- harmonics for current and phase voltage up to 63rd!

TECHNICAL DATA

MEASURING RANGE

Measured value	Measuring range	L1	L2	L3	Σ	Class
Current 1/5 A 1 A~ 5 A~	0.002..0.100..1.200 A 0.010..0.500..6.000 A ...100.00 kA ($\text{tr}_I \neq 1$)	.	.	.		0.2 (EN 61557-12)
Voltage L-N 57.7 V~ 110 V~ 230 V~ 400 V~	5.700..11.500..70.000 V 11.000..22.000..132.000 V 23.000..46.000..276.000 V 40.000..80.000..480.000 V ...1920.0 kV	.	.	.		0.2 (EN 61557-12)
Voltage L-L 100 V~ 190 V~ 400 V~ 690 V~	10.000..20.000..120.000 V 19.000..38.000..228.000 V 40.000..80.000..480.000 V 69.000..138.00..830.00 V ...1999.0 kV ($\text{tr}_U \neq 1$)	.	.	.		0.5 (EN 61557-12)
Active power P	-19999 MW .. 0,000 W19999 MW ($\text{tr}_U \neq 1, \text{tr}_I \neq 1$)	0.5 (EN 61557-12)
Reactive power Q	-19999 MVar .. 0,000 Var19999 MVar ($\text{tr}_U \neq 1, \text{tr}_I \neq 1$)	1 (EN 61557-12)
Apparent power S	0.000 .. 1999,9 VA19999 MVA ($\text{tr}_U \neq 1, \text{tr}_I \neq 1$)	0.5 (EN 61557-12)
Active energy EnP (imported or exported)	0.000 .. 99 999 999.999 kWh				.	0.25 (EN 62053-22)
Reactive energy EnQ (inductive or capacitive)	0.000 .. 99 999 999.999 kVarh				.	1 (EN 61557-12)
Apparent energy EnS	0.000 .. 99 999 999.999 kVAh				.	0.5 (EN 61557-12)
Active power factor PF	-1.00 .. 0 .. 1.00	1 (EN 61557-12)
Factor tg (ratio of reactive power to active power)	-999.99..-1.20 .. 0 .. 1.20..999.99	1
Frequency f	45.000..65.000..100.000 Hz				.	0.1 (EN 61557-12)
Total harmonic distortion of voltage THDU and current THDI	0.0 ..100.0 %	5 (EN 61557-12)
Amplitudes of the voltage $U_{h2}..U_{h63}$, and current $I_{h2} \dots I_{h63}$	0.0 ..100.0 %	.	.	.		II (IEC61000-4-7)

tr_I - Current transformer ratio = CT primary current / CT secondary current
 tr_U - Voltage transformer ratio = VT primary voltage / VT secondary voltage

DIGITAL INTERFACE

Interface type	Transmission protocol	Remarks
RS-485	Modbus RTU 8N2,8E1,8O1,8N1	Address 1..247 baud rate: 4.8, 9.6, 19.2, 38.4, 57.6, 115.2 kbit/s

EXTERNAL FEATURES


Readout field	graphic color display LCD TFT 3,5", 320 x 240 pixels	
Overall dimensions	96 x 96 x 77 mm	mounting hole 92.5 x 92.5 mm
Weight	0.3 kg	
Protection grade	from frontal side: IP65	from terminal side: IP20

RATED OPERATING CONDITIONS


Supply voltage	→ 80...253 V a.c. (40...50...400 Hz), 90...300 V d.c.	power consumption ≤ 6 VA
Power consumption	in voltage circuit ≤ 0.5 VA	in current circuit ≤ 0.1 VA
Input signal	0...0.1...1.2 In; 0.1...0.2...1.2 Un for current, voltage, PF, tgφi	frequency 45...50...60...100 Hz, sinusoidal (THD ≤ 8%)
Power factor	-1...0...1	
Preheating time	15 min.	
Ambient temperature	-10...23...55°C	class K55 acc. to EN61557-12
Humidity	0...40...60...95%	without condensation
Operating position	any	
External magnetic field	≤ 40...400 A/m d.c.	≤ 3 A/m a.c. 50/60 Hz
Short-term overload	voltage input: 2 Un (5 sec.)	current input 50 A (1 sec.)
Admissible crest factor	current: 2	voltage: 2
Additional error (in % of the intrinsic error)		from ambient temperature change: < 50% / 10°C

SAFETY AND COMPATIBILITY REQUIREMENTS

Electromagnetic compatibility	noise immunity radio-frequency common mode: • level 2: 0,15...1 MHz • level 3: 1 MHz...80 MHz	acc. to EN 61000-6-2, EN IEC 61326-1
Isolation between circuits	noise emissions basic	acc. to EN 61000-6-4, EN IEC 61326-1
Polution level	2	acc. to EN 61010-1
Overvoltage category OVC	III • for supply circuit and relay outputs 300 V • for measuring input 500 V • for circuits of RS-485: 50 V	for voltage to earth up to 300V acc. to EN 61010-1
Maximal phase-to-earth voltage	< 2000 m	

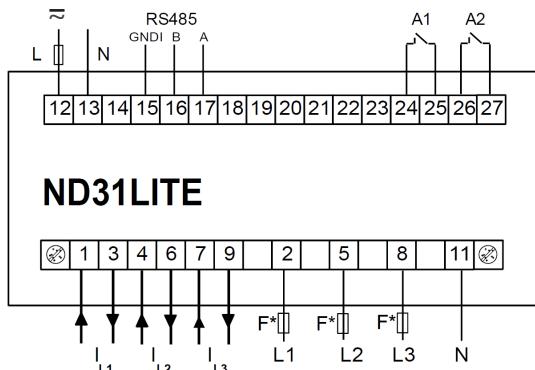CONNECTION DIAGRAMS

* Fuses must be provided by the customer

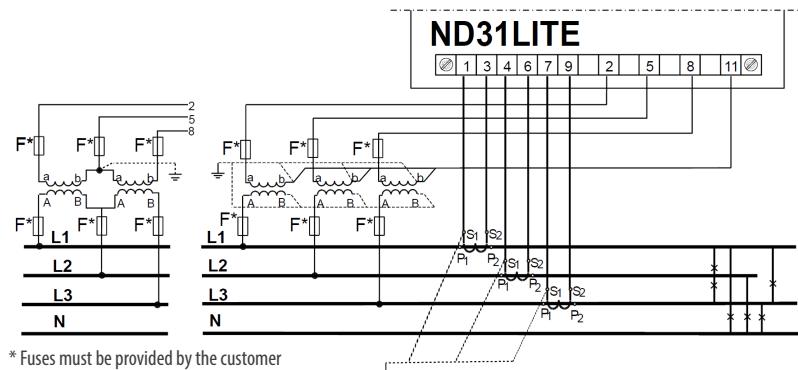

Description of meter connections strips

Indirect measurement in 4-wire network -
connection of input signals



DISPLAYING OF MEASUREMENT PARAMETERS

A1Ξ A2Ξ	225.48	1.005
U1 V	I1	A
228.91	2.105	
U2 V	I2	A
231.22	1.805	
U3 V	I3	A
49.999	1.638	
f Hz	avg	A
Del □ Min □ Max □ □ Menu		

A1Ξ A2Ξ	843.80	21 660 807.201
ΣP W	En P+ kWh	
726.01	2 786 343.635	
ΣQ var	En P- kWh	
1.126	13 760.862	
ΣS kVA	En Q- kvarh	
24 853 934.200	12 035.698	
En S kVAh	En Q+ kvarh	
Del □ Min □ Max □ □ Menu		


A1Ξ A2Ξ	225.48	226.57
U1 V	S1	VA
1.005	0.913	
I1 A	PF1	
206.88	0.447	
P1 W	tg1	
92.387	49.999	
Q1 var	f Hz	
Del □ Min □ Max □ □ Menu		

A1Ξ A2Ξ	0.905	0.905
U1 %	I1 %	%
0.905	0.903	
U2 %	I2 %	%
0.903	0.903	
U3 %	I3 %	%
Har. 5		
50160 □ □ □ □ □ Menu		

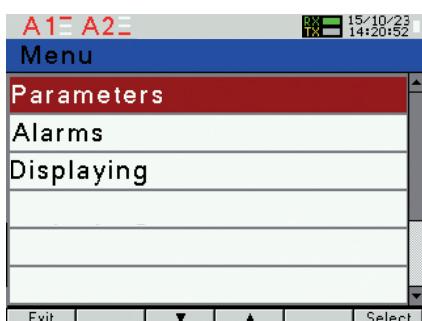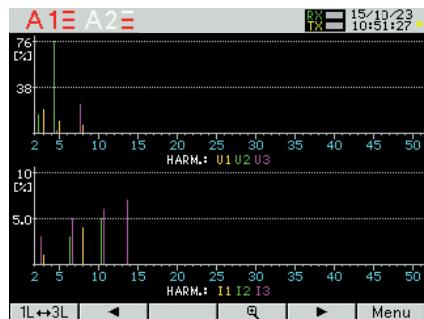

up to 10 programmable screens
(8 parameters per page);
ability to change color for all screens

Available colors for digital indications:

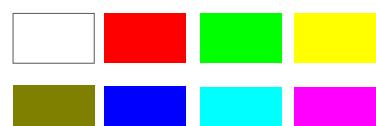


two screens dedicated to harmonics;
indication of individual harmonic
for voltages and currents (up to 51st);
bargraph presentation for all harmonics
with zoom function

presentation in the form of analog
meter view with min/max preview
for display value and zoom function

easy to use and intuitive menu;
information bar with status of:
phase sequence, alarm outputs,
RS-485 interfaces, time and date

METER CONFIGURATION WITH FREE eCON SOFTWARE

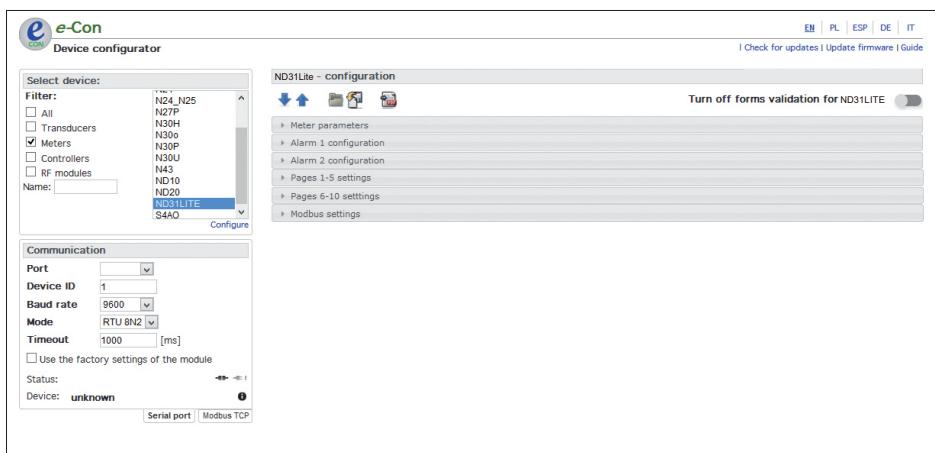

ability to configure and update ND31LITE
with free eCon software
(via RS-485 interface)

ORDERING CODE

Meter ND31LITE	1	1	1	1	X	X	XXXX
Input voltage (phase/phase-to-phase) Un:							
3 x 57.7/ 100 V, 3x 230/ 400 V	1						
Outputs/inputs:							
2 relays	1						
Interface:							
RS-485	1						
Supply:							
85...253 V a.c., 90...300 V d.c.	1						
Language:							
Polish/ English	M						
other*	X						
Acceptance tests:							
without additional quality requirements	0						
with an extra quality inspection certificate	1						
with an extra calibration certificate	2						
acc.to customer's request*	X						
Version:							
standard							
custom-made*							XXXX

* only after agreeing with the manufacturer

ORDERING EXAMPLE: The code **ND31LITE 1111M0** means:

ND31LITE – ND31LITE meter,
1 – input voltage 3 x 57.7/100 V, 3 x 230/400 V,
1 – 2 relays,
1 – interface RS-485
1 – supply 85..253 V a.c., 90..300 V d.c.
M – Polish/English version,
0 – without additional quality requirements,
– standard version.

LUMEL S.A.
ul. Skubicka 4,
65-127 Zielona Góra, Poland
tel.: +48 68 45 75 100

Technical support:
tel.: (+48 68) 45 75 143, 45 75 141,
45 75 144, 45 75 140
e-mail: export@lumel.com.pl

Export department:
tel.: (+48 68) 45 75 130,
45 75 131, 45 75 132
e-mail: export@lumel.com.pl

Calibration & Attestation:
e-mail:laboratorium@lumel.com.pl
e-mail: export@lumel.com.pl